

MSV-II TYPE III

Designed to Save...




Medix Specialty Vehicles, Inc.
3008 mobile Drive Elkhart, IN 46514
Ph 574-266-0911 - Fx 574-266-6669
Email - sales@medixambulance.com
www.medixambulance.com

Experience the Medix difference.

Medix MSV-II

E-450*170"L x 96"W x 72"H

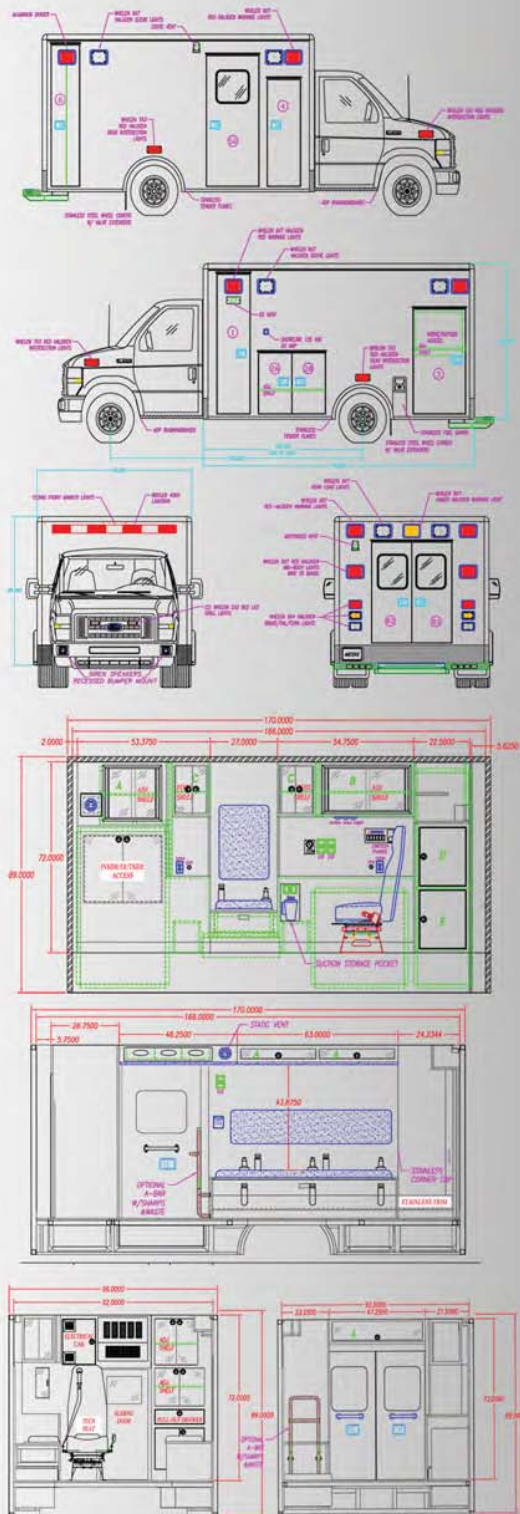

BODY

- Body- 2" x 2" x .125" w/.090" 5052-H32 Skin
- Sub-Floor- 2" x 2" x .125", 1.75" x 4" x .250"
- C-Channel w/.750" AL plate
- Floor- .060" AL barrier, .75" marine grade
- 75K PSI- Static Load Test
- FMVSS 206 Compliant w/30G Compliant
- Compartments-Smooth AL w/Herculiner Coat
- SS Front- O2 M-Cylinder Mount
- SS Middle- Open Storage
- SS Rear- Open Storage, I/O Upper
- CS Front, Upper- ALS w/IS/OS Access
- CS Front, Lower- Battery tray, roll-out
- SS Rear- Backboard/Stair Chair Storage
- Doors and Windows- tinted, fixed glass
- Trimark Free-floating, Chrome w/Anit-Slip
- Rear Bumper Frame- HD Steel tube frame powder coated black
- Rear Step- ADP rear pods w/flip-up step, rubber dock bumpers, CPI Cast Pods Optional
- Mud Flaps- Rubber rear
- Fender Flares- Roll-formed Stainless
- Running Boards- w/ADP splash guard
- Stone Guards- ADP each corner
- Rub Rails- "C" Channel w/1" Reflective strip

ENVIRONMENTAL/ELECTRICAL SYSTEMS

- Combo 36K BTU Heat, 32K BTU Cool
- 720 CFM multi-speed fan
- Exhaust Fan- 2-speed, 520 CFM
- Thermostatic Control
- Digital Volt/Amp meter
- Basic, easy maintenance relay/circuit breaker electrical system
- Electrical Cabinet- over Walk-Thru w/hinged, latching door
- Front/Rear Switch panels w/internal LED backlighting
- Wiring- GXL, point-to-point, color coded
- Front Console- Cowl-mounted, formed ABS body w/(2) cup holders
- Rear Control Panel- w/integral LED clock and thermostat
- Shoreline- 125V, 20-amp, 60 Hz receptacle
- Battery Charger- 45-amp
- Inverter- Pre-Wired
- 125 VAC Outlets- (2)
- 12 VDC Outlets- (2)
- Radio Power /Ground- (2) w/antenna coax cables

EMERGENCY LIGHTS & SIREN

- Light Bar, Front- Whelen 4500 Halogen
- R/W/R/W/R/W/R
- Exterior Body Lights- (6) 9x7 Red Halogen on side and rear corners; (1) 9x7 Amber Halogen center rear; (2) 9x7 Red Halogen rear mid-body as Brake and Warning
- Grille- (2) 5x2 Red LEDs w/chrome bezels
- Intersection- (4) 7x3 Red Halogen w/chrome bezels, (2) Front/(2) Over rear wheel wells
- Scene Lights- (4) 9x7 Halogen 8°-32°
- Load Lights- (2) 9x7 Halogen 8°-32°
- Spotlight, Hand-Held- 400,000 CP in cab
- Siren- Whelen 200 watt w/NC microphone in front console
- Speakers, Siren- (2) 100 watt thru front bumper

PATIENT COMPARTMENT INTERIOR

- Cabinet to Squad Bench Aisle- 50-inches
- Cab to Patient Compartment
- Walk-Thru- sliding door
- Laminated Wood Cabinetry-
- Full SS Wall cabinetry or w/CPR Seat
- Action Area and Overhead cabinet
- Walk-Thru and Bulkhead Storage Cabinets
- ALS Cabinet- Lower locking cabinet; Middle and Upper open storage w/adjustable shelf
- Lexan Sliding doors w/extruded pull handles
- 1/2" Hinged Acrylic Doors
- Southco 2" SS Latches
- I/O Access to OS #3
- Squad Bench- w/Overhead Storage
- Glove Storage- Over CS Entry Door
- Sharps/Waste drop-in w/red plex lid
- Technician's Seat- Captain's chair w/Type II lap/shoulder belt on swivel base
- Interior Lighting- (11) 4-3-4 w/15-minute check-out timer; 16" LED bar light in A/A
- Grab Handles- SS on each entry door panel
- Grab Rail- 72" overhead in ceiling
- Cushions, Vacu-Formed Upholstery
- Flooring- Lonplate II w/3" recessed roll-up
- SS Kick panels lower main and SB face

PATIENT CARE SYSTEMS

- Suction Aspirator- SSCOR recessed in lower main
- Oxygen Outlets- (2) in Action Area, (1) over Squad Bench
- Oxygen Cylinder Brt-Adjustable for H or M
- IV Holders- (2) CPI 2008, fold-down, recessed hangers
- Cot Mount- FW #175-4, dual, removable

PAINT, DECALS, LETTERING

- Star-of-Life Decals- Optional
- Paint Stripe- Optional
- Lettering/Graphics Package- Optional
- (2) NO SMOKING, (2) FASTEN SEATBELTS

WARRANTIES

- Electrical- 72 months / 72,000 miles
- Limited- 12 months / 12,000 miles
- Paint- 48 months
- Body Structure- Limited Lifetime



3008 Mobile Drive / Elkhart, IN 46530 * Ph 574-266-0911 / Fax 574-266-6669